

## **Overview of the artificial neural networks and fuzzy logic applications in operational hydrological forecasting systems**

**JITENDRA P. DAVE<sup>1</sup> and DIVYAKANT T. MEVA<sup>2</sup>**

C.U. Shah College of Master of Computer Application,  
Wadhwan City, District Surendranagar, Gujarat (India).

(Received: July 25, 2009; Accepted: September 30, 2009)

### **ABSTRACT**

Damage due to flooding has increase in many countries in the last years, and due to the global climate change, which is now recognized as a real threat, an increase in the occurrence of flooding events and especially of flash flooding events is likely to continue into the future. In those conditions and because building new flood defences structures for defending vulnerable areas has serious financial implications, the timely forecasting of floods is becoming more important for flood defence and in general for water management purposes. The complexity of natural systems and of hydrological processes that influence river levels evolutions make the traditional modelling approaches, based on mirroring natural processes with physically based equations very difficult. Despite the fact that in the last decades the Operational Hydrological Forecasting Systems were significantly developed, becoming more and more complex systems, ingesting and processing in real time a great amount of data from automated hydrometrical and meteorological stations networks and high resolution grided data from radars and satellites, together with the use of distributed hydrological models, the warning and forecasts improvements are not very significant, in many cases the performance of the new physically based distributed models being comparable with the "older" conceptual lumped models. The paper presents an overview of some alternative and complementary modelling approaches, artificial neural networks and fuzzy logic systems, possible applications for the improvements of the Operational Hydrological Forecasting Systems, and presenting also some example of rainfall-runoff modelling implementations.

**Key words:** Artificial neural networks, fuzzy logic applications, forecasting systems.

### **INTRODUCTION**

Artificial neural networks are widely used as an effective approach for handling non-linear and noisy data, especially in situations where the physical processes relationships are not fully understood and they are also particularly well suited to modelling complex systems on a real-time basis. Fuzzy logic is a generalisation of Boolean logic implementing the concept of partial truth or uncertainty, so within the fuzzy set theory an element can have a gradual membership to different sets. To describe system behaviour with fuzzy logic, you need to define fuzzy sets, fuzzy rules or so called IF-THEN rules and apply a fuzzy inference scheme. The generation of a fuzzy forecast model

can be based both on experts knowledge and historical data. In conclusion, both artificial neural networks and fuzzy logic modelling systems offer the potential for a more flexible, less assumption approach to hydrological processes, and they have already been demonstrated as successfully substitutes for the classical rainfall – runoff models, and also as tools for the real time updating of hydrological forecasting models and especially for the multimodel approach. Keywords: hydrological forecasting model, artificial neural network, fuzzy logic, operational hydrological forecasting systems.

### **Operational hydrological forecasting systems**

On a global scale, floods account for over 65% of people affected by natural disasters and

they are the most damaging of all natural disasters. Better forecasting floods and with a larger lead time, is the main sustainable way of adapting to and managing such disasters. Operational hydrological forecasting systems, which link state of the river catchments, river discharges and water levels, recorded precipitations and weather forecasts, can be used to respond to floods as they occur and to reduce their costs in term of lives, property and other damages. Current flood forecasting and warning systems have several limitations, such as, insufficient lead-time to provide accurate flood warnings, inadequate spatial and temporal resolution of the real-time rainfall observations and forecasts for flood producing storm, little integration of different sources of forecast information. Moreover their ability in considering the uncertainties in estimating and forecasting precipitation and flood discharges is very limited.

The desirable characteristics of a good flood forecasting system are:

#### **Timeliness**

The lead-time is the time between making a forecast of an event and its occurrence, if sufficient lead-time is available and the predictions are accurate then evacuation, even of relatively large numbers of people may be possible. The increase of the lead-time is mainly limited by the availability of reliable quantitative precipitations forecasts, but also can be limited by the hydrological models or forecasting methodologies that are implemented.

#### **Accuracy**

Is usually related to the correctness the forecasts of the magnitude and time of the flood peak and of the resulting levels. In special situations, it may relate to the forecasts of the complete hydrograph of the flood. The more accurate the forecast the better flood control/modification and damage mitigation measures can be implemented.

#### **Reliability**

Can be associated with accuracy, but is related to the overall long-term reliability of the flood forecasting system, and not just to the accuracy of a forecast for a particular flood. Usually the long-term reliability of the system can be assessed by its performance in two respects. It should always

forecast a flood when one occurs and it should not forecast floods when one doesn't occur. The reliability, like accuracy, affects the confidence in deciding on response measures, as the public perception of warnings messages may be very important. Forecasts require both data collection and modelling. The amounts of data and the complexity of the modelling necessary to achieve specific targets of lead-time, accuracy and reliability vary from catchment to catchment, and there is a natural conflict between the desire for greater forecast leadtime and greater accuracy and reliability (usually the warning messages are based on model simulations that take into account just the recorded precipitations and not the forecasted precipitations). Generally the longer the lead times the less accurate and reliable are the forecasts of flood magnitude, location and timing.

#### **Operational hydrological forecasting systems have (or could have) the following components**

##### **Data acquisition systems**

Is the basic component for an operational system, and the data type and availability have major implications on the modelling part of the system.

##### **Rainfall forecasts models**

Is the most important part for the forecast lead-time increase. Unfortunately the present results of the numerical meteorological models are not enough accurate for the hydrological forecasts applications. On short term, the solution could be a combination with the short future scan estimations based on radar information.

##### **Rainfall-runoff forecasts models**

The possible approach extend from the extremely simple forecast relations, event type model, through conceptual semi-distributed models, which are still the most used models in operational, to complex physically based models.

##### **Flood routing and flood plain models**

The hydrological routing methods are still extensively used, but the general direction is to use appropriate hydraulic models, which take into account the river geometry, and allow reasonable estimations of flood maps.

### Flood impact analysis component

If flood maps are available, flood impact analysis could be finally obtained by superimposing flood maps with GIS georeferenced spatial data on constructions, traffic, agriculture, etc.

### Artificial neural networks models

The field of neural networks has a history of five decades but has found solid application only in the past decade, and the field is still developing rapidly. Neural networks are composed of many simple elements operating in parallel. These elements are inspired by biological nervous systems. The network function is determined largely by the connections between elements.

Neural networks have been trained to perform complex functions in various fields of application including pattern recognition, forecasting, identification, classification, speech, vision and control systems. Artificial neural networks can be characterised most adequately as computational models with particular properties such as the ability to adapt or learn, to generalise, or to cluster or organise data, and which operation is based on parallel processing.


An artificial network consists of a pool of simple processing units which communicate by sending signals to each other over a large number of weighted connections.

#### A set of major aspects can be distinguished

- ' a set of processing units (neurons);
- ' a state of activation for every unit, which also determines the output of the unit;
- ' connections between the units, generally each connection is defined by a weight which determines the effect which the signal of one unit has on other unit;
- ' a propagation rule, which determines the effective input of a unit from its external inputs;
- ' an activation function, which determines the new level of activation based on the effective input and the current state;
- ' an external input or offset for each unit;
- ' a neural network architecture;
- ' a training method.

Within neural systems it is useful to distinguish three types of units: input units which may receive data from outside the system, output units which send data out of the system and hidden units whose input and output signals remain within the system itself.

The neuron model and the architectures of a neural network describe how a network transforms its input into an output. Both the neuron model and the network architecture each place limitations on what a particular model can compute. The way a network computes its output must be understood before training methods for the network can be explained.

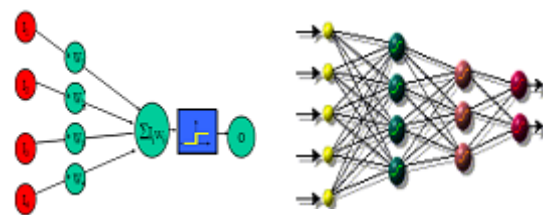

**Fig. 1: Typical representation of an artificial neuron model and for a full connected feed forward neural network, with two hidden layers**

Backpropagation neural networks have been successfully used as a basic tool for the construction of effective forecasting schemes. Different neural network architectures have been proposed as the basis of forecasting methods. The one hidden layer feedforward network is gaining broad acceptance due to its simplicity and expressiveness power. This net can be thought of as a nonlinear autoregressive (AR) model. The mathematical relationship, established through the sigmoid processing elements of the network, is essentially nonlinear.

### Review of artificial neural networks and fuzzy logic applications in hydrological forecasting

Especially over the last decade, neural network-based flood forecast models have been increasingly used in hydrology. Usually, the input data of the network are composed by past measurements of flows and rainfalls, and eventually the basin state could be assessed analyzing the

rainfall occurred on a certain time window before the flood event. The most used neural networks type is the feedforward network trained with backpropagation family algorithms. In some applications are implemented neural network that uses recurrence, i.e. outputs at some level are fed back in as inputs. This allows the net to better train on time dependent data. Examples of this are Jordan, Elman, Real-Time Recurrent Learning (RTRL) networks, or Time Delay Neural Network (TDNN), which uses not only the current input data values (time  $t$ ) but also the previous several input sets ( $t-1$ ,  $t-2$ . etc.).

In general, the fuzzy models used for hydrological forecasting are based on a fuzzy rule base describing the hydrological behaviour of the river basin. Expert knowledge about specific discharge situations combined with precipitation information and soil moisture conditions can be transformed directly in IF ... THEN ... rules, using linguistic entities like discharge=low AND precipitation=high AND soil moisture=high and thus building up an initial rule base. Optimization procedures are then used to adapt the rule base on the basis of data from former flood events in order to achieve an optimal forecast model.

Such kind of modelling systems has already successfully been used for operational hydrological forecasts elaboration in river basin with different sizes and with different lead times. The computational effort of forecasts with different time horizons requires only few seconds on a standard PC. Another recently developed computing technique is the neurofuzzy approach, which is a combination of a fuzzy computing approach and an artificial neural network technique.

This approach is becoming one of the major areas of interest because it gets the benefits of neural networks as well as of fuzzy logic systems and it removes the individual disadvantages by combining them on the common features. Neural networks and Fuzzy logic have some common features such as distributed representation of knowledge, model-free estimation, ability to handle data with uncertainty and imprecision etc. Fuzzy logic has tolerance for imprecision of data, while neural networks have tolerance for noisy data. A

neural network's learning capability provides a good way to adjust expert's knowledge and it automatically generates additional fuzzy rules and membership functions to meet certain specifications. This reduces the design time and cost. On the other hand, the fuzzy logic approach possibly enhances the generalization capability of a neural network by providing more reliable output when extrapolation is needed beyond the limits of the training data. The neuro-fuzzy system consists of the components of a conventional fuzzy system except that computations at each stage is performed by a layer of hidden neurons and the neural network's learning capacity is provided to enhance the system knowledge.

The system contains at least the following three different layers:

#### **Fuzzification Layer**

In a fuzzification layer each neuron represents an input membership function of the antecedent of a fuzzy rule.

#### **Fuzzy Rule Layer**

In a fuzzy inference layer fuzzy rules are fired and the value at the end of each rule represents the initial weight of the rule, and will be adjusted to its appropriate level at the end of training.

#### **Defuzzification Layer**

In the defuzzification layer each neuron represents a consequent proposition and its membership function can be implemented by combining one or two sigmoid functions and linear functions. The weight of each output link here represents the centre of gravity of each output membership function of the consequent and is trainable. After getting the corresponding output the adjustment is made in the connection weights and the membership functions in order to compensate the error and produce a new control signal.

Different successfully applications, of those different computing techniques, have been reported by a large number of researchers, especially in the last decade. Between the applications that are related to the hydrological forecasting activity we can mention:

• Rainfall-runoff modelling;

- Flood routing;
- Directly forecasts of water levels;
- Link different individual forecasting models into a single forecasting system multimodel / consensus / combination river flow forecasting);
- Forecasting river ice jams break-up;
- Modeling of the flood forecasting uncertainty;
- Quantitative precipitations forecasts;
- River flow forecasts updating technique;
- Control and optimization of reservoir operations;
- Replicating complex hydraulics or rainfall-runoff models;
- Non-linear, non-unique stage-discharge relationship.

### CONCLUSIONS

After the general review of neural networks and fuzzy logic modelling approaches characteristics and applications we can summarize the following conclusions:

- Both neural networks and fuzzy logic models are a convenient way to map an n-dimensional input space to an m-dimensional output space, being especially useful when the relation between input and output space variables is not well-known, except the fact that is a nonlinear relation.
- Artificial neural networks are widely used as an effective approach for handling non-linear and noisy data, especially in situations where the physical processes relationships are not fully understood and they are also particularly well suited to modelling complex systems on

a real-time basis.

- Fuzzy logic is a very powerful tool for dealing quickly and efficiently with imprecision and nonlinearity.
- The generation of a fuzzy forecast model can be based both on experts knowledge and historical data.
- Both artificial neural networks and fuzzy logic modelling systems offer the potential for a more flexible, less assumption approach to hydrological processes, and they have already been demonstrated as successfully substitutes for the classical rainfall – runoff models, and also as tools for the real time updating of hydrological forecasting models and especially for the multimodel approach.

In the next 3 years, the national DESWAT decisional and informational integrated national system for management in case of disasters project will be implemented. The hydrological modelling and forecasting system of this project will implement the following modelling component:

- National Weather Service River Forecasting System (NWSRFS - USA);
- NOAA – LIS distributed modelling component;
- TOPLATS distributed model, for some specific catchments;
- FLASH FLOOD GUIDANCE component.

After the first year modelling system implementation, we intend to investigate the possibility of adding into the system of modelling component using the neural network and fuzzy logic approaches.

### REFERENCES

1. Carling A., *Introducing Neural Network*. SIGMA PRESS - Wilmslow, United Kingdom (1992).
2. Michael A. Arbib, *The Handbook of Brain Theory and Neural Networks*. THE MIT PRESS, Massachusetts Institute of Technology, United States of America (1995).
3. Todorean G., Costeiu M., Giurgiu M., *Artificial neural networks*, Blue Press, Cluj-Napoca. *Romania* (1995).
4. Dumitrescu D., Hariton C., *Neural networks, theory and applications*, Ed. Teora, Bucharest, *Romania* (1996).
5. French, M.N., Krajewski, W.F. and Cuykendall, R.R., Rainfall forecasting in space and time using a neural network, *Journal of Hydrology*, **137**: 1-31 (1992).
6. Govindaraju, R.S., Anmala, J., Nedunuri, K.V.

- and Koelliker, J.K., Use of neural networks in predicting the nonlinear rainfall-runoff relationships for small watersheds, paper presented at the European Geophysical Society General Assembly, Hamburg, 1995 and abstracted in the conference proceedings (1995).
7. Liong, S.Y., Nguyen, V.T.V., Chan, W.T. and Chia, Y.S., Regional Estimation of Floods for Ungaged Catchments with Neural Networks. In Cheong, H-F., Shankar (1994).
  8. Maier, H.R. and Dandy, G.C., The use of artificial neural networks for the prediction of water quality parameters, *Water Resources Research*, **32**(4): 1013-1022 (1996).
  9. Wilby, R.L., Abrahart, R.J., Dawson, C.W., Detection of conceptual model rainfall-runoff processes inside an artificial neural network, *Hydrological Sciences Journal*, **48**(2): 163-181 (2003).
  10. Zekai, Sen, 2004 : Fuzzy logic and system models in water sciences, Turkish Water Foundation, Istanbul.
  11. M.Stuber, P. Gemmar, M. Greving, Machine supported Development of Fuzzy – Flood Forecast Systems, European Conference on Advances in Flood Research, Potsdam, PIK Report Nr. 65 (2000).
  12. C. Mahabir, F.E. Hicks, A. Robinson Fayek, Forecasting Ice Jam Risk at Fort McMurray, AB, using Fuzzy Logic, Proceedings of the 16th IAHR Intrnational Symposium on Ice, Dunedin, New Zealand (2002).
  13. Linda See, Robert J. Abrahart, Stan Openshaw, An Integrated Neuro-Fuzzy-Statistical Approach to Hydrological Modelling, School of Geography, University of Leeds, UK (1998).
  14. S. Alvisi, G. Mascellani, M. Franchini, A. Bardossy, Water level forecasting through fuzzy logic and artificial neural network approaches, published in Hydrology and Earth System Science Discussions, EGU (2005).
  15. P.C. Nayak, K.P. Sudheer, D.M. Rangan, K.S. Ramasastri, Short-term flood forecasting with a neurofuzzy model, *Water Resources Research*, 41 (2005).
  16. Marius Matreata, National Institute of Hydrology and Water Management, Bucharest, ROMANIA.